

NSR-9514BDC

Polymer Multi-Function Duty / Personal-Size Flashlight Rechargeable (no AC power supply)

MARKET APPLICATIONS	Law enforcement, fire & rescue, industrial, security, hardware/tool, automotive, hunting/recreation.
DESCRIPTION	The NSR-9514B rechargeable glass-filled nylon polymer LED flashlight, offers 3 microprocessor-controlled brightness modes as well as a strobe function. Utilizing a CREE® LED, the 9514B has an impressive runtime of 4.25 hours in full-brightness mode. The 350 lumen output in combination with the high efficiency deep parabolic reflector design throws a usable beam of light 313 meters...that's over 1,026 feet. The 9514B has a two button design, a switch located on the waterproof body of the light and one in the tail cap. Both switches operate in tandem with one another. Meets requirements of NFPA-1971-8.6 (2013).
CASE MATERIAL	Glass-filled Nylon Polymer w/ Aircraft-grade 6061-T6 Aluminum Tail Cap & Bezel both with a Type III Hard Anodized Finish - Black
DIMENSIONS	Length: 8.9 inches (226 mm) • Handle diameter 1.2 inches (30 mm) • Head diameter 1.6 inches (41 mm)
WEIGHT	Weight: 10.1 oz. (286 g) with battery installed.
LENS	Unbreakable polycarbonate with scratch resistant coating.
LIGHT SOURCE	Cree® LED. Impervious to shock with a 50,000 + hour lifetime.
LIGHT OUTPUT	High-Brightness - 350 lumens • Medium-Brightness - 200 lumens • Low-Brightness 55 lumens • Strobe - 300 lumens
ON/OFF	Single Body Switch & Single Tail Switch (Tandom Functionality) - Momentary or Constant-on Flashlight, High, Medium and Low-Brightness Flashlight, Strobe
RUN-TIME	High-brightness - 4.25 hours • Medium-brightness - 8.5 hours • Low-brightness - 32.5 hours • Strobe - 5.5 hours
BATTERY	2-cell, 3.7 Volt Lithium-ion battery pack.


CHARGING	Charging platform is wall or vehicle mountable. Charges in 4 hours (typical) on 100 / 240 50/60 Hz or 12V DC.
FEATURES	<ul style="list-style-type: none"> • CREE® LED technology – 50,000 + hours LED life • Momentary or constant-on plus 3 brightness levels & strobe • Sharp focused beam • Glass-filled nylon polymer housing • Aircraft-grade 6061-T6 aluminum tail-cap and bezel both with a Type III hard anodized finish • Non-slip grip • Body & tail switch • Waterproof • Impact & chemical resistant • Meets requirements of NFPA-1971-8.6 (2013) • Serialized for personal identification • Powered by rechargeable Lithium-ion battery (included) • Includes wall or vehicle mounted charger as well as the DC power supply and anti-roll ring

WARRANTY	Limited Lifetime Warranty • Includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.
-----------------	--

APPROVALS



FL1 STANDARD	HIGH	MEDIUM	LOW
	350 LUMENS	200 LUMENS	55 LUMENS
	4h 15min	8h 30min	32h 30min
	313m	235m	118m
	24100cd	12075cd	6200cd
	2m		
	1m		

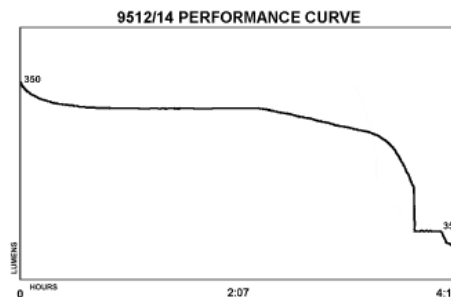

OPTIONAL ACCESSORIES

AC power supply, 5 Bank Charger, Direct Wire Kit, USB Charging Cable, Red, Yellow & Blue Safety Cones