
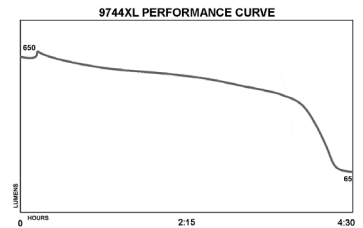







NSR-9744XL

Xtreme Lumens™ Metal Multi-Function Full-Size Dual-Light™ Flashlight

MARKET APPLICATIONS	Law enforcement, fire & rescue, industrial, security, hardware/tool, automotive, hunting/recreation.
DESCRIPTION	This full-size rechargeable metal multi-function Xtreme Lumens™ Dual-Light™ flashlight uses an LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 200 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The second body switch operates the floodlight. The housing and tail-cap are made from air-craft-grade 6061-T6 aluminum and bezel is constructed from 316 stainless steel bezel. The housing, tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery. Meets requirements of NFPA-1971-8.6 (2013).
CASE MATERIAL	Aircraft-grade 6061-T6 Aluminum with Type III Hard Anodized Finish - Black
DIMENSIONS	Length: 11.8 inches (300 mm) • Handle diameter: 1.2 inches (30 mm) • Head diameter: 1.6 inches (41 mm)
WEIGHT	Weight: 17.5 oz. (496 g) with battery installed.
LENS	Unbreakable polycarbonate with scratch resistant coating.
LIGHT SOURCE	Cree® LED. Impervious to shock with a 50,000 hour lifetime.
LIGHT OUTPUT	Flashlight: High - 650 lumens, Medium - 300 lumens, Low - 150 lumens, Strobe - 300 lumens • Floodlight: 200 lumens • Dual-Light: 400 lumens
ON/OFF	First Body Switch - Momentary or Constant-on Flashlight, High, Medium and Low-Brightness Flashlight, Strobe • Second Body Switch - Floodlight • First & Second Body Switch - Dual-Light
RUN-TIME	Flashlight: High - 7 hours, Medium - 14 hours, Low - 29 hours, Dual-Light: 8.75 hours
BATTERY	2-cell, 6 Volt Lithium-ion battery pack
CHARGING	Charger is wall or vehicle mountable. Charges in 4 hours (typical) on 100 / 240 50/60 Hz or 12V DC.
FEATURES	<ul style="list-style-type: none"> • LED technology • Flashlight/Floodlight/Dual-Light™ • Momentary or constant-on plus 3 brightness levels & strobe • Sharp focused flashlight beam • High-efficiency deep parabolic reflector • Effective beam distance of 275 meters (over 902 feet) • Unfocused wide-beam floodlight for close-up illumination • Dual-Light (flashlight & floodlight at the same time) for maximum safety & versatility • Aircraft-grade 6061-T6 aluminum housing/tail cap/bezel • Type III hard anodized finish • Non-slip grip • Flashlight/strobe – body switch • Floodlight – second body switch • Waterproof • Impact & chemical resistant • Meets requirements of NFPA-1971-8.6 (2013) • Serialized for personal identification • Powered by Lithium-ion rechargeable battery (included)
WARRANTY	Limited Lifetime Warranty • Includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.
APPROVALS	
OPTIONAL ACCESSORIES	5 Bank Charger, Direct Wire Kit, USB Charging Cable, Red, Yellow & Blue Safety Cones



FL 1 STANDARD	HIGH	MEDIUM	LOW
	650 LUMENS	300 LUMENS	150 LUMENS
	7h	14h	29h
	275m	200m	146m
	18675cd	9687cd	4857cd
	2m / 1m		

Designed in USA, manufactured in China at a ISO-9001 certified Bayco facility.

Bayco Products, Inc. • 640 South Sanden Blvd. • Wylie, TX 75098 • 1-800-233-2155 • 1-469-326-9400 • www.nightstick.com

PDS-NSR-9744XL-19