

NSR-9924XLLB

Xtreme Lumens™ Polymer Multi-Function Duty/Personal-Size Dual-Light™ Flashlight Rechargeable (light & battery only)

MARKET APPLICATIONS

Law enforcement, fire & rescue, industrial, security, hardware/tool, automotive, hunting/recreation.

DESCRIPTION

This duty/personal-size rechargeable polymer multi-function Xtreme Lumens™ Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 600 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body and tail switches provide momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Both flashlight switches operate in tandem with each other. The second body switch operates the floodlight. The housing is made from glass-filled nylon polymer and has an aircraft-grade 6061-T6 aluminum tail-cap and a 316 stainless steel bezel. Both the tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery. Meets requirements of NFPA-1971-8.6 (2013).

CASE MATERIAL

Glass-filled Nylon Polymer w/ Aircraft-grade 6061-T6 Aluminum Tail Cap & Bezel both with a Type III Hard Anodized Finish - Black

DIMENSIONS

Length: 9.5 inches (241 mm) • Handle diameter: 1.2 inches (30 mm) • Head diameter: 1.6 inches (41 mm)

WEIGHT

Weight: 9.9 oz. (241 g) with battery installed.

LENS

Unbreakable polycarbonate with scratch resistant coating.

LIGHT SOURCE

Cree® LED. Impervious to shock with a 50,000 hour lifetime.

LIGHT OUTPUT

Flashlight: High - 650 lumens, Medium - 300 lumens, Low - 100 lumens, Strobe - 300 lumens • Floodlight: 600 lumens • Dual-Light: 600 lumens

ON/OFF

First Body Switch & Tail Switch - Momentary or Constant-on Flashlight, High, Medium and Low-Brightness Flashlight, Strobe • Second Body Switch - Floodlight • First (or Tail Switch) & Second Body Switch - Dual-Light

RUN-TIME

Flashlight: High - 3 hours, Medium - 6 hours, Low - 17 hours, Strobe - 6 hours • Floodlight: 3 hours • Dual-Light: 3 hours

BATTERY


2-cell, 6 Volt Lithium-ion battery pack

CHARGING

Optional charger is wall or vehicle mountable. Charges in 4 hours (typical) on 100 / 240 50/60 Hz or 12V DC.

FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology – 50,000+ hours LED
- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused flashlight beam
- High-efficiency deep parabolic reflector
- Effective beam distance of 275 meters (over 902 feet)
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at the same time) for maximum safety & versatility
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail cap and bezel both with Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe – body & tail switch (tandem operation)
- Floodlight – second body switch
- Waterproof
- Impact & chemical resistant
- Meets requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by Lithium-ion rechargeable battery (included)
- Includes light and battery only

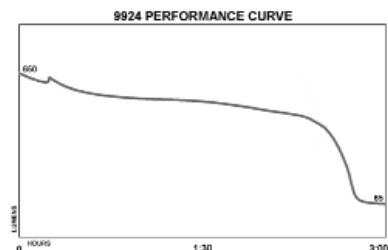

FL1 STANDARD	HIGH	MEDIUM	LOW
	650 LUMENS	300 LUMENS	100 LUMENS
	3h	6h	17h
	275m	200m	75m
	18675cd	9687cd	1356cd
	2m / 1m		

WARRANTY

Limited Lifetime Warranty • Includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.

APPROVALS



OPTIONAL ACCESSORIES

Wall or Vehicle Mountable Charger, AC Power Supply, DC Power Supply, 5 Bank Charger, Direct Wire Kit, USB Charging Cable, Red, Yellow & Blue Safety Cones

Designed in USA, manufactured in China at a ISO-9001 certified Bayco facility.

PDS_NSR-9924XLLB_141216_A