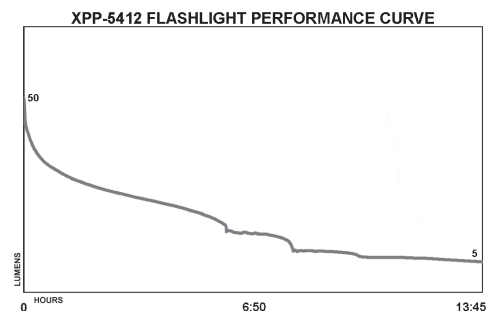


XPP-5412G Intrinsically Safe Penlight

MARKET APPLICATIONS	Hazardous work environments, industrial, automotive, law enforcement, fire & rescue
DESCRIPTION	This non-rechargeable penlight is cETLus, ATEX and IECEx listed Intrinsically Safe. It is ultra-compact and super slim with a powerful light output designed to illuminate very tight spaces. The tail-cap switch provides momentary or constant-on functionality. Power comes from 3 AAAA premium batteries (included).
CASE MATERIAL	Engineered Polymer - Green
DIMENSIONS	Length: 6.8 inches (173 mm) • Head Diameter: 0.6 inches (15 mm) • Handle Diameter: 0.5 inches (13 mm)
WEIGHT	Weight: 1.5 oz. (43 g) with batteries installed
LENS	Unbreakable polycarbonate with scratch resistant coating
LIGHT SOURCE	Flashlight: CREE® LED Impervious to shock with a 50,000 hour lifetime
LIGHT OUTPUT	50 lumens
ON/OFF	Single Tail-Cap Switch - Momentary or Constant-on Flashlight
RUN-TIME	13.75 hours
BATTERY	3 Premium alkaline AAAA batteries (included)
FEATURES	<ul style="list-style-type: none"> • cETLus, ATEX and IECEx listed Intrinsically Safe • CREE® LED technology – 50,000 + hours LED life • Momentary or constant-on flashlight • Sharp focused beam for illuminating tight spaces • Engineered polymer housing • Non-slip grip • Single body switch • Waterproof • Impact & chemical resistant • Built-in pocket/belt clip • Includes 3 premium AAAA alkaline batteries









WARRANTY Limited Lifetime Warranty • Includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.


APPROVALS



FL 1 STANDARD

 50 LUMENS	 13h 45min	 50m
 161cd	 2m	 1m

Nightstick 5412 Penlight



Intertek

ID 4001184
INTRINSICALLY SAFE
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3	Ex ia op is I Ma
CLASS II & III DIV1 GRPS E-G T135C	Ex ia op is IIC T3 Ga
CLASS I ZONE 0 AEx ia IIC T3 Ga	Intertek ITS 13 ATEX27839X
CLASS I ZONE 0 Ex ia IIC T3 Ga	IECEX ITS 14.0036X
Ⓜ I M 1 Ex ia op is I Ma	-20°C ≤ Tamb ≤ +40°C
Ⓜ II 1 G Ex ia op is IIC T3 Ga	1.5V/Cell AAAA Alkaline

CE 0359

Conforms to:	Certified to:
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26	CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25