

## XPP-5450GC

### Intrinsically Safe Dual-Function Headlamp with Hard Hat Clip

**MARKET APPLICATIONS**

Hazardous work environments, industrial, automotive, law enforcement, fire & rescue

**DESCRIPTION**

This dual-function headlamp is cETLus, ATEX, and IECEx listed Intrinsically Safe. This headlamp features a multi-position tilt head design and integrated stainless steel hard hat clip. The top mounted switch provides user selectable high or low brightness spotlight operation. Power comes from 3 AAA batteries (included).

**CASE MATERIAL**

Engineered Polymer - Green

**DIMENSIONS**

Length: 2.4 inches (61 mm) • Width: 1.9 inches (48 mm) • Depth: 1.8 inches (46 mm)

**WEIGHT**

Weight: 3.5 oz. (99 g) with batteries installed

**LENS**

Polycarbonate with scratch resistant coating

**LIGHT SOURCE**

CREE® LED Impervious to shock with a 50,000 hour lifetime

**LIGHT OUTPUT**

High-Brightness Spotlight: 90 lumens, Low-Brightness Spotlight: 50 lumens

**ON/OFF**

Single Body Switch. High-Brightness Spotlight, Low-Brightness Spotlight

**RUN-TIME**

High-Brightness Spotlight: 13.5 hours, Low-Brightness Spotlight: 22.75 hours

**BATTERY**

3 AAA batteries (included)

**FEATURES**







- CREE® LED technology – 50,000 + hours LED life
- High-brightness spotlight, low-brightness spotlight
- Focused spotlight beam for distance illumination
- Engineered polymer housing
- Single switch located on top of light
- Adjustable ratchet tilt head
- Integrated Stainless Steel Clip for attachment to hard hat mounting brackets
- Dustproof / Waterproof
- Impact & chemical resistant
- 3 AAA batteries (included)


**WARRANTY**

Limited Lifetime Warranty


**APPROVALS**



FL 1 STANDARD	HIGH	LOW
	<b>90</b> LUMENS	<b>50</b> LUMENS
	<b>13h</b>	<b>22h</b>
	<b>80m</b>	<b>65m</b>
	<b>1615cd</b>	<b>1076cd</b>
	<b>2m</b>	
	<b>1m</b>	

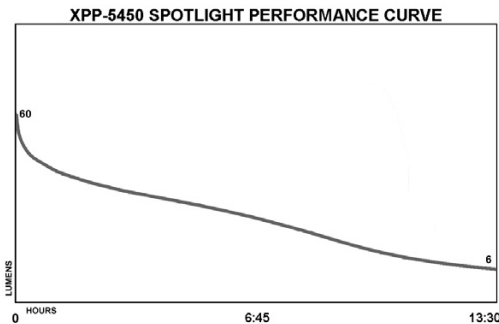


**Bayco Products, Inc. XPP-5450GC**  
 640 S. Sanden Blvd.  
 Wylie, TX 75098

 ID 4001184  
 INTRINSICALLY SAFE  
 SECURITE INTRINSEQUE

**Intertek**

CLASS I DIV 1 GRPS A-D T3	Ex ia op is IIC T3 Ga
CLASS II & III GRPS E-G T135C	Intertek ITS 13 ATEX27854X
CLASS I ZONE 0 AEx ia IIC T3 Ga	IECEX ITS 17.0002X
CLASS I ZONE 0 Ex ia IIC T3 Ga	-20°C ≤ Tamb ≤ +40°C
Ⓢ II 1 G Ex ia op is IIC T3 Ga	1.5V/Cell AAA Alkaline

 0359