






XPP-5454GC


Intrinsically Safe Dual-Light™ Headlamp w/ Hard Hat Clip and Mount

MARKET APPLICATIONS	Hazardous work environments, industrial, automotive, law enforcement, fire & rescue
DESCRIPTION	This 3 AAA Intrinsically Safe Dual-Light™ Headlamp w/Hard Hat Clip & Mount is cETLus, ATEX, INMETRO and IECEx listed Intrinsically Safe. This headlamp features a multi-position tilt head design and includes an integrated Stainless Clip and adhesive hard hat mounting bracket for hands-free operation. The dual top mounted switches provide user-selectable high or low-brightness spotlight, high or low-brightness floodlight operation and our exclusive Dual-Light design... the ability to turn on both the spotlight and the floodlight at the same time for maximum user safety and lighting versatility. Power comes from 3 AAA premium batteries (included).
CASE MATERIAL	Engineered Polymer - Green
DIMENSIONS	Width: 2.6 inches (66 mm) • Height: 2.1 inches (53 mm) • Depth: 1.8 inches (46 mm)
WEIGHT	Weight: 3.4 oz. (97 g) with batteries installed
LENS	Unbreakable polycarbonate with scratch resistant coating
LIGHT SOURCE	CREE® LED Impervious to shock with a 50,000 hour lifetime
LIGHT OUTPUT	High-Brightness Spotlight: 115 lumens • Low-Brightness Spotlight: 60 lumens • High-Brightness Floodlight: 120 lumens • Low-Brightness Floodlight: 60 lumens • Dual-Light: 160 lumens
ON/OFF	Dual Switches. High/Low Spotlight, High/Low Floodlight, Dual-Light
RUN-TIME	High-Brightness Spotlight: 5 hours • Low-Brightness Spotlight: 16.25 hours • High-Brightness Floodlight: 5.25 hours • Low-Brightness Floodlight: 16.25 hours • Dual-Light: 3.5 hours
BATTERY	3 Alkaline AAA batteries (included)
FEATURES	<ul style="list-style-type: none"> • cETLus, ATEX and IECEx listed Intrinsically Safe • CREE® LED technology – 50,000 + hours LED life • 5 modes: high/low spotlight, high/low floodlight & Dual-Light™ • Integrated Stainless Steel Clip attaches to hard hat mounting bracket (included) • Focused spotlight beam for distance illumination • Unfocused wide-beam floodlight for close-up illumination • Dual-light (any spotlight & floodlight mode at same time) for maximum versatility • Engineered polymer housing • Dual switches located on top of light • Adjustable ratchet tilt head • Dustproof / Waterproof • Impact & chemical resistant • 3 AAA batteries (included)

FL1 STANDARD	DUAL-LIGHT	HIGH	LOW
	160 LUMENS	115 LUMENS	60 LUMENS
	3h 30min	5h	16h
	94m	82m	60m
	1711cd	1668cd	882cd
	2m 1m		

WARRANTY Limited Lifetime Warranty

APPROVALS

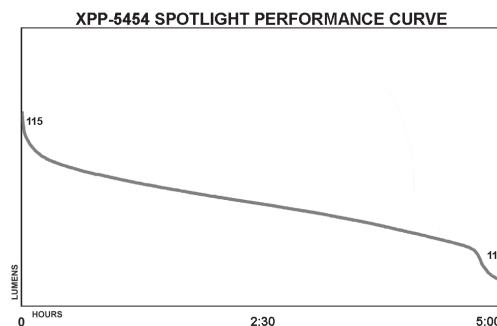

Bayco Products, Inc. XPP-5454GC
640 S. Sanden Blvd., Wylie, TX 75098

ID 4008947
INTRINSICALLY SAFE
SECURITE INTRINSEQUE


Intertek


INMETRO ocp 0034
(20°C ≤ Tamb ≤ +40°C)
NCC 15.0296 X

CLASS I DIV 1 GRPS A-D T3 Ex ia op is IIC T3 Ga
 CLASS II & III GRPS E-G T135°C Intertek ITS 13 ATEX27928X
 CLASS I ZONE 0 AEx ia IIC T3 Ga IECEx ITS 18.0030X
 Ex ia IIC T3 Ga -20°C ≤ Tamb ≤ +40°C
 Ⓢ II 1 G Ex ia op is IIC T3 Ga 1.5V/Cell E92 or EN92

CE 0359

Conforms to:	Certified to:
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11	CAN/CSA STD C22.2 No 157 CAN/CSA STD C22.2 No 60079-0 CAN/CSA STD C22.2 No 60079-11 CSA STD C22.2 No 25

Designed in USA, manufactured in China at a ISO-9001 certified Bayco facility, US Patent 9,713,217.