

XPP-5460GCX

X-Series Intrinsically Safe Low-Profile Dual-Light™ Headlamp with Hard Hat Clip


MARKET APPLICATIONS	Hazardous work environments, industrial, automotive, law enforcement, fire & rescue
DESCRIPTION	This X-Series Intrinsically Safe Low-Profile Dual-Light™ Headlamp with Hard Hat Clip is cULus, ATEX and IECEx listed Intrinsically Safe. This headlamp features a multi-position tilt head design and includes an integrated Stainless Clip for attachment to most hard hat mounting brackets. Both the spotlight and the floodlight use CREE® LED's and an advanced (TIR) Total Internal Reflection lens designed to optimize lumen output and beam pattern. Front mounted dual switches provide easy access to the spotlight for distance illumination, the floodlight for close-up illumination, and Dual-Light for maximum lighting, versatility and user safety. The XPP-5460GCX includes a hard hat mount for use on a fire helmet or hard-hat, and is powered by 3 AAA batteries (included).
CASE MATERIAL	Engineered Polymer - Green
DIMENSIONS	Length: 3.54 in (90 mm) • Width: 1.54 inches (40 mm) • Depth: 1.875 inches (48 mm)
WEIGHT	Weight: 5.8 oz. (166 g) with batteries installed
LENS	Unbreakable polycarbonate with scratch resistant coating
LIGHT SOURCE	CREE® LED Impervious to shock with a 50,000 hour lifetime
LIGHT OUTPUT	High-Brightness Spotlight: 180 lumens • Low-Brightness Spotlight: 100 lumens • High-Brightness Floodlight: 180 lumens • Low-Brightness Floodlight: 100 lumens • Dual-Light: 200 lumens
ON/OFF	Dual Switches. High/Low Spotlight, High/Low Floodlight, Dual-Light
RUN-TIME	High-Brightness Spotlight: 3.5 hours • Low-Brightness Spotlight: 10 hours • High-Brightness Floodlight: 3.5 hours • Low-Brightness Floodlight: 10 hours • Dual-Light: 3 hours
BATTERY	3 Alkaline AAA batteries (included)
FEATURES	<ul style="list-style-type: none"> • cULus, ATEX and IECEx listed Intrinsically Safe • CREE® LED technology – 50,000+ hours LED • Focused high/low-brightness spotlight beam for distance illumination • Unfocused high/low-brightness wide-beam floodlight for close-up illumination • Dual-Light™ (spotlight and floodlight on at the same time) for maximum versatility • Glass-filled nylon polymer housing • (TIR) Total Internal Reflection lens designed to optimize lumen output and beam pattern • Dual switches located on front of light • Adjustable tilt head • Hard hat clip for fire helmets and hard hats • Dustproof/Waterproof • Impact & chemical resistant • Powered by 3 AAA batteries (included)

FL1 STANDARD	DUAL-LIGHT	HIGH	LOW
	200 LUMENS	180 LUMENS	100 LUMENS
	3h	3h 30 min	10h
	78m	106m	74m
	1528cd	2799cd	1399cd
	2m		
	1m		

WARRANTY

Limited Lifetime Warranty

APPROVALS

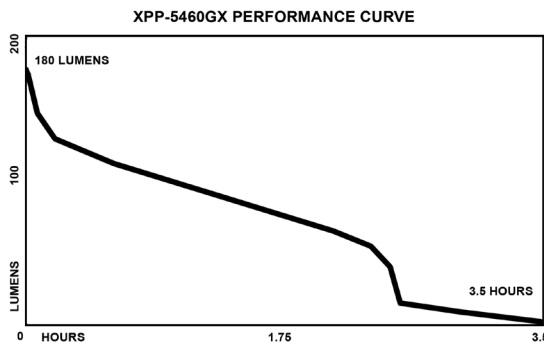

Bayco Products, Inc. XPP-5460
Wylie, TX 75098

UL LISTED Ex ia FLASHLIGHT FOR USE IN HAZARDOUS LOCATIONS
E 467756 CLASS I DIV 1 GRPS A-D T4 Ex ia IIC T4 Ga
INTRINSICALLY SAFE CLASS II & III DIV 1 GRPS E-G DEMKO 17 ATEX 1824
SECURITE INTRINSEQUE CLASS I ZONE 0 GRP IIC T4 IECEx UL 17.0003
CE 0359 CLASS II ZONE 20 IIC T135°C -20°C ≤ Tamb ≤ +40°C
Ⓜ II 1 G Ex ia IIC T4 Ga 1.5V/Cell / E92 or EN92

WARNINGS:
Replace batteries in a non-hazardous location.
Use only Energizer Model E92 or EN92 batteries.

AVERTISSEMENT:
Remplacer les piles dans une zone non dangereuse.
Utiliser uniquement les piles Energizer AAA - modèle E92 ou EN92.