

LI-ION RECHARGEABLE

INTRINSICALLY SAFE SCENE LIGHT

XPR-5592GX / XPR-5592GCX

NIGHTSTICK®

Life Depends on Light™

MAGNETIC MOUNT

Non-marring rubber covered base positions light for **360° rotation** and **holds firm**.



Steel-reinforced carry handle also functions as convenient mounting hook where needed.



Locking cam allows carry handle to telescope to ideal length and position.



Blow-molded case **(included)**



Large adjustment knobs means light can be positioned and secured for hands-free work.



Sealed switch and charging port cap ensure full IP-67 waterproof & dustproof protection.



Also available as a kit with 6 foot tripod and blow-molded case. (XPR-5592GCX)

1000 LUMENS

1-800-233-2155 • 1-469-326-9400 • nightstick.com

© 2019 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates.

INTRINSICALLY SAFE

SCENE LIGHT

LI-ION RECHARGEABLE

ITEM NUMBER/UPC

XPR-5592GX - 017398807005
 XPR-5592GCX - 017398807012

CERTIFICATIONS

- CE
- BC
- cULus
- Meets requirements of NFPA 1971-8.6 (2013)

CASE MATERIAL

- Glass-filled nylon polymer

LUMENS/RUNTIME

- HIGH: 1000L, 6 hrs. runtime
- LOW: 500L, 17 hrs. runtime

WATER RATING

- IP-67 (dustproof, waterproof)

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 13.5 in (343mm)
- WIDTH: 9.25 (235mm)
- DEPTH: 3.5 in (89mm)
- WEIGHT: 4 lbs 4 oz (1,928g)

BATTERY

- Integrated rechargeable li-ion battery

WARRANTY

- 1 Year limited warranty

WHAT'S INCLUDED

- XPR-5592GX
- Scene Light
 - AC & DC charging cords
 - Blow-molded case
- XPR-5592GCX
- Scene Light
 - 6 foot tripod
 - AC & DC charging cords
 - Blow-molded case



E 467756
 ID 4002026
 ELECTRICAL SAFETY
 INTRINSICALLY SAFE
 SECURITE INTRINSEQUE




Bayco Products, Inc. XPR-5592
 640 S. Sanden Blvd., Wylie, TX 75098
 FLOODLIGHT FOR USE IN HAZARDOUS LOCATIONS
 For use with Bayco Li-ion Battery Pack 5592-BATT only

CLASS I DIV 1 GRPS A-D T4
 CLASS II & III DIV1 GRPS E-G T135°C
 CLASS I ZONE 0 GROUP IIC T4 Ga
 -20°C ≤ Tamb ≤ +40°C
 3.7V/Cell Li-ion

SEE INSTRUCTION MANUAL
 VOIR MANUEL

MFG MM-YY

XPR-5592GX SCENE LIGHT PERFORMANCE CURVE

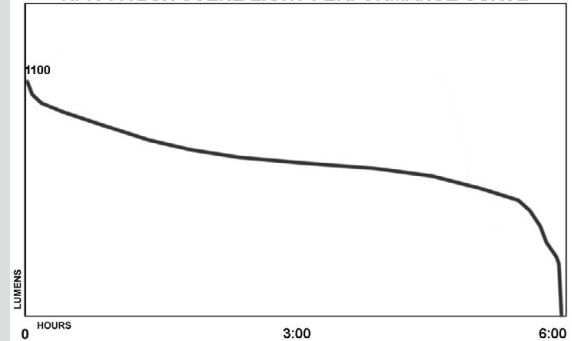

CERTIFIED



NFPA



© 2019 Bayco Products, Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates. XPR-5592GX-Series 9.

